



CTM42

CTM系列-高速锯片电机

电压：三相220V-380/400V-50HZ

功率：0.37KW-18KW

转数：50HZ.-3000RPM


变频器调速：100HZ. 6000RPM 150HZ-9000RPM, 200HZ-12000RPM, 300HZ-18000RPM

特点：可变频调速，高转数，高精度，方型机身, 安装灵活。可匹配ER夹头使用。

应用：复合材料切割，型材切割。高速锯切设备。精密小型切割设备。数控加工, 钻孔, 切削。



www.carpali.com

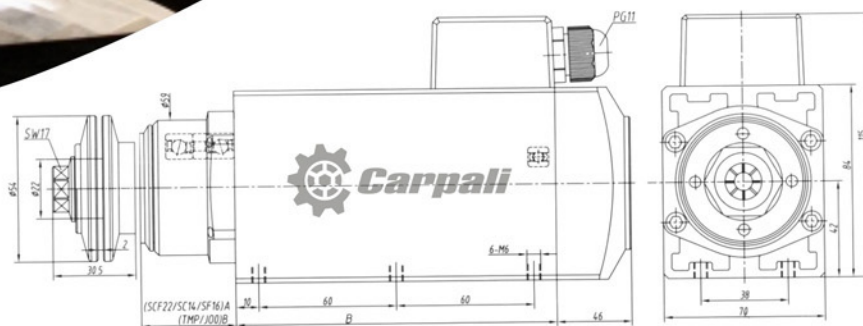




型号Type	转速 r/min	额定功率 KW	额定 电压V	额定 电流A	最高频 率Hz	最大扭矩Nm	夹持盘端面 跳动 μm	夹持盘 直径mm	轴直径 (锯盘内孔安装) 尺寸mm	冷却	外形尺寸mm		
											长	宽	高
CTM42C-12/1.1SCF22	12000	1.1	220/380	4.78/2.76	200	0.88	小于8	62	22	风冷	289	70	84
CTM53D-03/1.5SCF25.4	3000	1.5	220/380	6.5/3.75	50	4.78	小于8	88	25.4	风冷	355	92	106
CTM53D-09/2.2SCF25.4	9000	1.5	220/380	9.7/5.6	150	2.34	小于8	80	25.4	风冷	355	92	106

CTM68



www.carpali.com

型号Type	转速 r/min	额定功率 KW	额定 电压V	额定 电流A	最高频 率Hz	最大扭矩Nm	夹持盘端面 跳动 μm	夹持盘 直径mm	轴直径 (锯盘内孔安装) 冷却 尺寸mm	外形尺寸mm	长	宽	高
CTM68B-03/1.5SCF30	3000	1.5	220/380	6.00/3.45	50	5.1	小于8	106	30	风冷	340	120	136
CTM68B-03/1.5SCF25.4	3000	1.5	220/380	6.4/3.7	50	2.4	小于8	106	25.4	风冷	340	120	136
CTM68B-06/1.5SCF25.4	6000	1.5	220/380	6.4/3.7	100	2.4	小于8	106	25.4	风冷	340	120	136
CTM68C-03/2.2SCF30	3000	2.2	220/380	8.80/5.10	50	7.4	小于8	106	30	风冷	380	120	136
CTM68D-03/3.0SCF30	3000	3.0	220/380	11.8/6.80	50	10	小于8	106	30	风冷	420	120	136

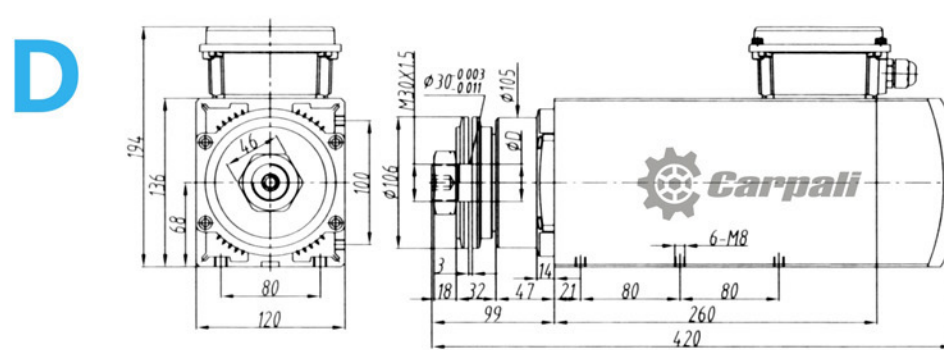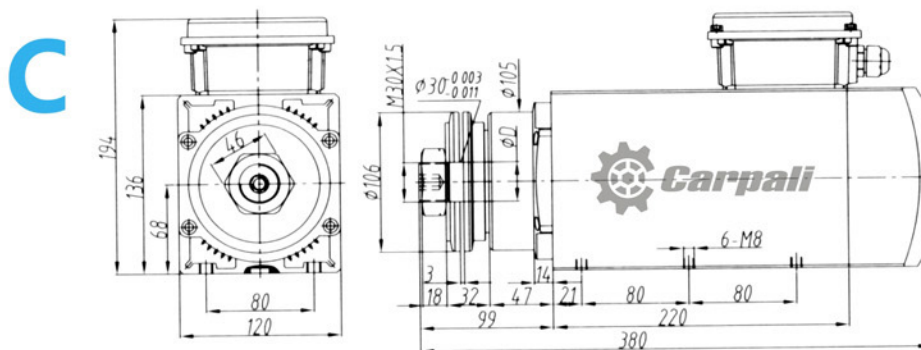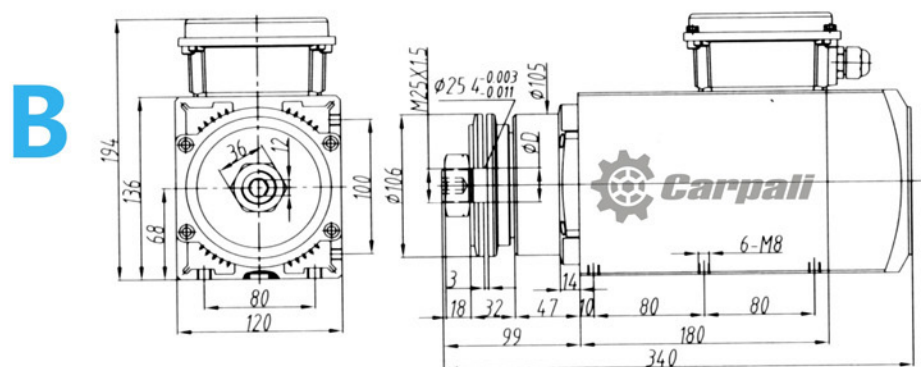




www.carpali.com


CTM71

型号Type	转速 r/min	额定功率 KW	额定 电压V	额定 电流A	最高频 率Hz	最大扭矩Nm	夹持盘端面 跳动 μm	夹持盘 直径mm	轴直径 (锯盘内孔安装) 尺寸mm	冷却	外形尺寸mm		
											长	宽	高
CTM71B-03/2.2SFA30	3000	2.2	220/380	9.70/5.60	50	7.0	小于8	126	30	风冷	399	142	142
CTM71B-06/2.2SFA30	6000	2.2	220/380	9.70/5.60	100	3.5	小于8	126	30	风冷	399	142	142
CTM71C-03/3.0SFA30	3000	3.0	220/380	12	50	10	小于8	126	30	风冷	439	142	142
CTM71C-06/3.0SFA30	6000	3.0	220/380	11.8/6.8	100	10	小于8	118	30	风冷	465	142	142
CTM71C-03/4.0SFA30	3000	4.0	220/380	15.4/8.90	50	13.5	小于8	126	30	风冷	479	142	142
CTM71C-03/5.8SFA30	3000	5.8	220/380	20.4/11.8	50	19.37	小于8	126	30	风冷	519	142	142
CTM71D-06/6.0SFA30L	6000	6.0	220/380	21.6/12.5	100	9.55	小于8	126	30	风冷	456	142	142
CTM71D-06/7.5SFA30	6000	7.5	220/380	25.8/14.9	100	11	小于8	126	30	风冷	479	142	142


C

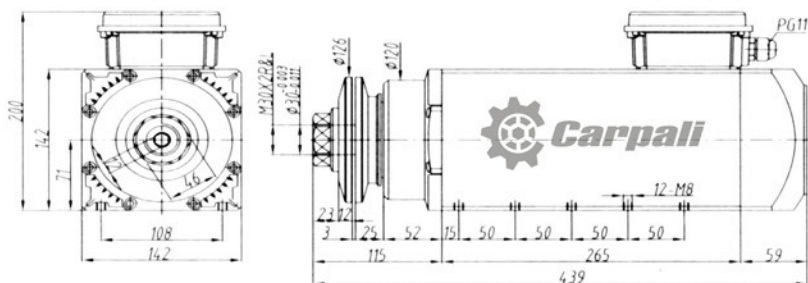

D

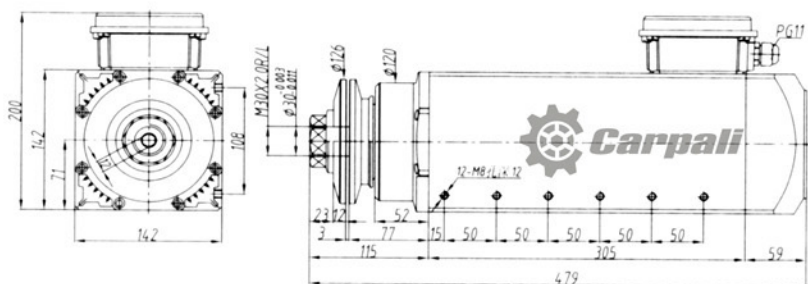

E

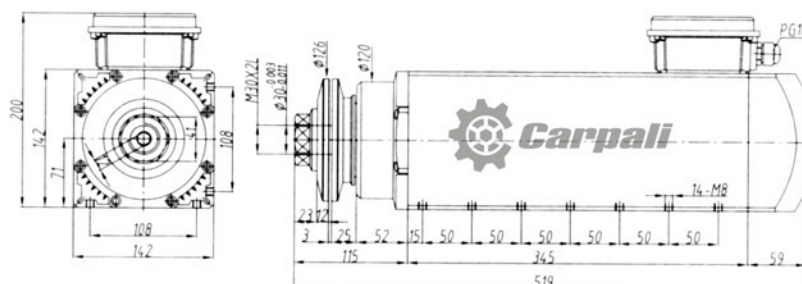


CTM98



www.carpali.com

型号Type	转速 r/min	额定功率 KW	额定 电压V	额定 电流A	最高频 率Hz	最大扭矩Nm	夹持盘端面 跳动 μm	夹持盘 直径mm	轴直径 (锯盘内孔安装) 尺寸mm	冷却	外形尺寸mm		
											长	宽	高
CTM98C-03/7.5SCF30	3000	7.5	220/380	26.7/15.4	50	23.9	小于8	126	30	风冷	400	170	196
CTM98E-03/11SCF30	3000	11	220/380	38.9/22.5	50	35	小于8	164	30	风冷	586	170	196
CTM98E-03/18SCF30	3000	18	220/380		50	58	小于8	164	30	风冷	586	170	196

C

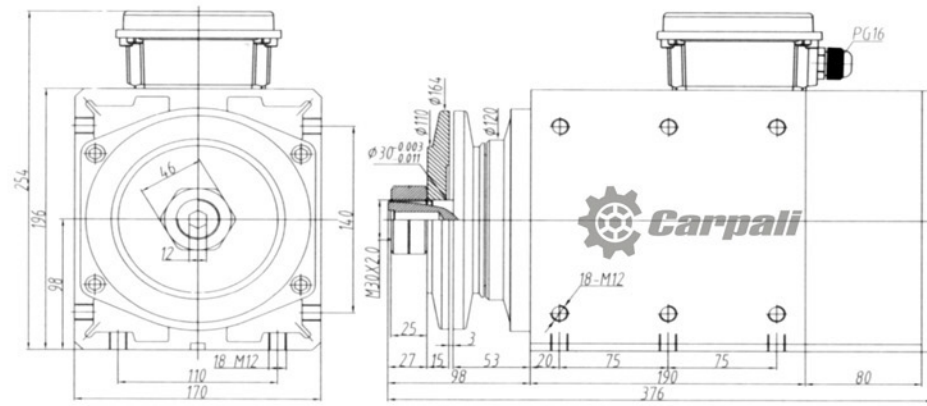

E

